




Zehntner Marking Retroreflection

ZDR 6020 RL

Vehicle-mounted retroreflectometer for safe and efficient continuous measurements

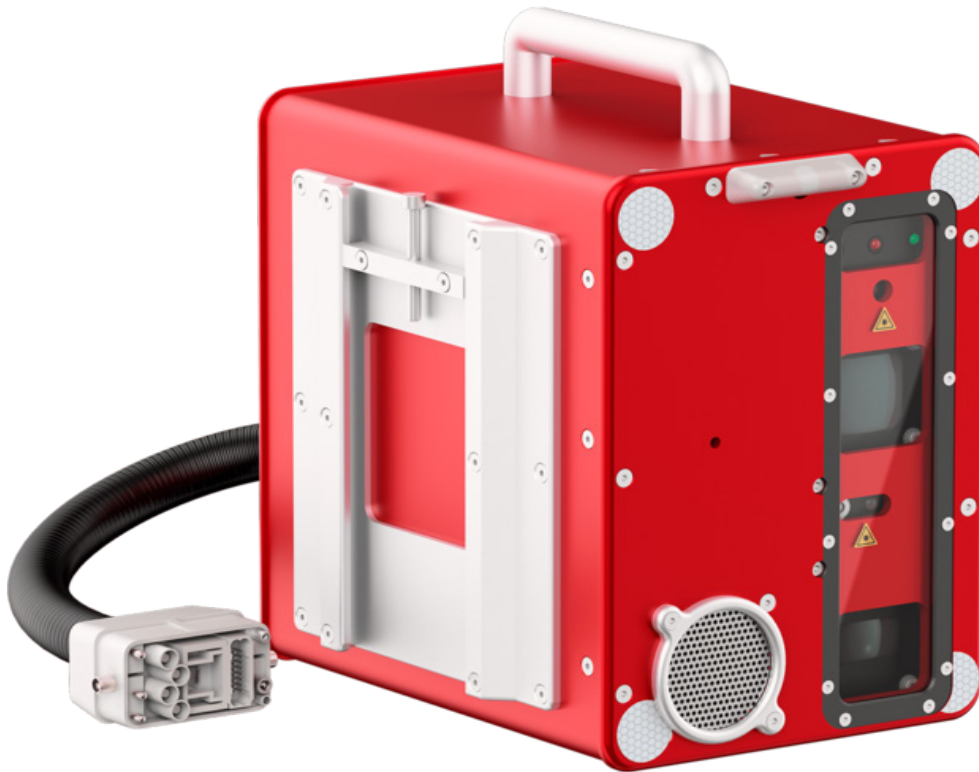

Reliability

Vehicle-mounted with 300 measurements per second guaranteeing accurate and continuous coverage for all types of colors and road markings





Accuracy

Handheld precision at up to 150 km/h (93 mph) without obstructing traffic and for all light conditions, even in bright sunlight



User Experience

Measurements can be evaluated with the free mapping and tools software on an industrial-grade touchscreen tablet with a multilingual user interface



Instrument

Tech Specs

Technology	Integrated camera for road surveillance with 10m (32.81 ft) picture sequence
Measuring Resolution	Data recording with 300 measurements per second
Display	11.6 in. touchscreen tablet with installed ZDR 6020 RetroGrabber software and microphone
Measurements	Measuring area (WxL) - $\geq 1000 \text{ mm} \times 880 \text{ mm}$ ($\geq 39.4'' \times 34.65''$) Measuring distance in front of the measuring head - 6 m (19.7 ft) Measuring speed - max. 150 km/h (93.21 mph)
Measuring Range	$R_L: 0 - 4'000 \text{ mcd} \cdot \text{m}^{-2} \cdot \text{lx}^{-1}$ Profiled Markings: $\approx 20 \text{ mm}$ (0.79")
Measuring Accuracy	Handheld precision at up to 150 km/h (93 mph)
Observation Angle	EN 1436: 2.29° ASTM E 1710: 1.05°
Illumination Angle	EN 1436: 1.24° ASTM E 1710: 88.76°
Reporting software	Includes mapping and data analysis software MappingTools
Weight	Measuring Head: 10.5 kg (23.1 lbs)
Operating Temperature	0°C to 55°C (32°F to 131°F)
Special Features	Languages available: German, English, Spanish, French Italian, Russian, Chinese, Korean

Standards & Guidelines	Description
ASTEM E2176 (Withdrawn 2013)	
ASTM E1710-18	Standard Test Method for Measurement of Retroreflective Pavement Marking Materials with CEN-Prescribed Geometry Using a Portable Retroreflectometer
ASTM E2177	Standard Test Method for Measuring the Coefficient of Retroreflected Luminance (RL) of Pavement Markings using the Bucket Method in a Condition of Wet Recovery
CIE 54.2	
EN 13197	
EN 1436	

Authorized Distributor



NL SCIENTIFIC INSTRUMENTS SDN. BHD. (881121-P)
 No. 16, Lorong Sungai Puloh 1A/KU6,
 Taman Teknologi Gemilang,
 Kawasan Perindustrian Sungai Puloh,
 42100 Klang, Selangor, Malaysia.

Email
sales@nl-test.com

Hotline
 +603-3884 6088

Website
www.nl-test.com

