
GRAPHTEC 10 CHANNELS 4.3" COLOR DISPLAY DATA LOGGER

Temperature Measurement

Data Logger with 4.3 inch color display, 10 isolated analog channels, 4 digital channels, 4 alarm outputs, 4GB internal memory, SDHC card slot (max 32GB), USB PC interface. Includes APS software, start-up manual, AC power supply.

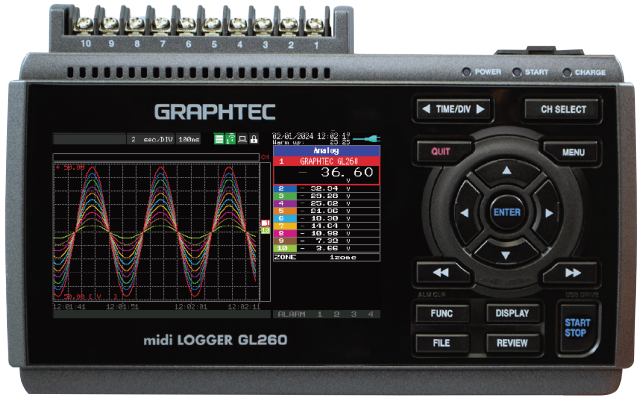

Features :

- Wireless LAN capability | remote monitoring & datalogging
- Flexible input system for wide array of applications
- Ability to access additional (GL100) sensors & adapters
- Extended memory capacity using SD memory card
- Max sampling interval up to 10ms
- Smartphone access

Technical Specifications :

Model Number	NL 7099 X / 003
Alternate Code	GL260
Input Method	All channels isolated, balanced input, Scans channels for sampling
Type of Input Terminal	Screw terminal (M3 screw)
Measurement Range	**Voltage** : 20mV - 100V, 1-5V F.S. (Full Scale) **Thermocouple Type** : K, J, E, T, R, S, B, N, C and (the old W: WRe5-26) **Humidity** : Humidity: 0 - 100% (option B-530 is required)
Filter	Off, 2, 5, 10, 20, 40 (moving average in selected number)
Measurement Accuracy	**Voltage** : ± 0.1% of F.S. (Full Scale) **Temperature (Thermocouple)** :

Type	Measurement Range	Accuracy
R	0 ≤ TS ≤ 100 °C 100 < TS ≤ 300 °C 300 < TS ≤ 1600 °C	± 5.2 °C ± 3.0 °C ± (0.05% of rdg. + 2.0 °C)
S	0 ≤ TS ≤ 100 °C 100 < TS ≤ 300 °C 300 < TS ≤ 1760 °C	± 5.2 °C ± 3.0 °C ± (0.05% of rdg. + 2.0 °C)
B	400 ≤ TS ≤ 600 °C 600 < TS ≤ 1820 °C	± 3.5 °C ± (0.05% of rdg. + 2.0 °C)
K	-200 ≤ TS ≤ -100 °C -100 < TS ≤ 1370 °C	± (0.05% of rdg. + 2.0 °C) ± (0.05% of rdg. + 1.0 °C)
E	-200 ≤ TS ≤ -100 °C -100 < TS ≤ 800 °C	± (0.05% of rdg. + 2.0 °C) ± (0.05% of rdg. + 1.0 °C)
T	-200 ≤ TS ≤ -100 °C -100 < TS ≤ 400 °C	± (0.1% of rdg. + 1.5 °C) ± (0.1% of rdg. + 0.5 °C)
J	-200 ≤ TS ≤ -100 °C -100 < TS ≤ 100 °C 100 < TS ≤ 1100 °C	± 2.7 °C ± 1.7 °C ± (0.05% of rdg. + 1.0 °C)
N	-200 ≤ TS < 0 °C 0 ≤ TS ≤ 1300 °C	± (0.1% of rdg. + 2.0 °C) ± (0.1% of rdg. + 1.0 °C)
W	0 ≤ TS ≤ 2000 °C	± (0.1% of rdg. + 1.5 °C)
R.J.C.		± 0.5 °C

A/D converter	Sigma-Delta type, 16 bits (effective resolution: 1/40000 of the measuring full range)
Maximum Input Voltage	**Between (+) / (-) terminal** : 20mV - 1V range: 60V p-p 2V - 100V range: 110V p-p **Channels ((-) / (-))** : 60 Vp-p **Channel / GND** : 60 Vp-p
Max. Voltage (withstand)	**Between channels** : 350 Vp-p (1 minute) **Channel / GND** : 350 Vp-p (1 minute)

NEW 2026

- **10 analog input channels**
- **Programmable per channel**
- **±20 mV to ±100 V over 12 ranges**
- **Supports direct-connected thermocouples of any type**
- **Full isolation per channel**
- **4 discrete input channels**
- **4 discrete alarm outputs**
- **Programmable as a group as logic or pulse inputs**
- **Pulse inputs support counter or frequency inputs**
- **Optional WiFi wireless operation with optional B-568 module**
- **Communicate with up to (1) GL100 unit with B-568 Wifi module**
- **Flexible triggering**
- **Built-in, 4.3-inch color display**
- **Built-in Web server operation for remote operations**
- **Operates either stand-alone or PC-connected.**



Set Consists Of :

Model Number	Parts Description	Qty
NL 7099 X / 001 – P001	4 in 1 Plug & Play Type-K Thermocouple Sensors	10set

*1 Copy of Manual Instruction

Copyright 2026 NL Scientific Instruments Sdn. Bhd. All Rights Reserved. Revision 1(All information in this catalogue only for customer's reference and not for quotation. Design and dimension maybe change without prior notice.)