



LOS ANGELES RESISTANCE ABRASION APPARATUS

Standard: ASTM C131, EN 1097-2

Determination of the Resistance to Fragmentation

Upgraded version to ECO-SMARTZ system for more stable & better performance. This apparatus used to determine the resistance of aggregates to abrasion. The drum is rotated by a speed reducer driven by an electric motor, equipped with an automatic counter. Abrasive need to charge order separately.

Technical Specifications :

Model Number	NL 1008 X / 003
Drum Speed	31 - 33 RPM
Product Dimension	1070 (L) x 700 (W) x 910 (H) mm
Approx. Dimension	1270 (L) x 900 (W) x 1110 (H) mm
Approx. Weight	363 kg
Packing Weight	390 kg
Power	220~240 V, 350 W, 50/60 Hz, 9.5 A


Unit Consists Of :

Model Number	Parts Description	Qty
NL 1008 X / 003 – P 001	Control Panel	1no.
NL 1008 X / 003 – P 002	Receiving Tray	1no.

*1 Copy of Manual Instruction

Optional Accessories :

Model Number	Accessories Description
NL 1008 X / 003 – A 001	Safety & Sound Proof Cabinet
NL 1008 X / 001 – A 002	ASTM, AASHTO, UNI, CNR Abrasive Charges (Set of 12 nos.)
NL 1008 X / 001 – A 003	EN Standard Abrasive Charges (Set of 12 nos.)

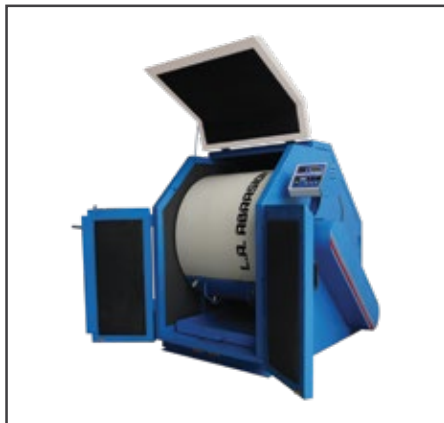

Opened Sound Proof Cabinet



Closed Sound Proof Cabinet